



1 1/2"
plug



2"
plug



2 1/2"
plug



Winterization Instructions Winterizing Stack Plugs

for all Paraskim Skimmers, DDC2 Canister
or any 1 1/2", 2" or 2 1/2" female threaded ports



Paramount
Pool Life, Simplified.

295 East Corporate Place • Suite 100 • Chandler, AZ 85225


Toll Free: 1.800.621.5886 • Phone: 480.893.7607 • Fax: 480.753.3397

Paramount@1Paramount.com • www.1Paramount.com

US and Foreign patents and patents pending see www.1paramount.com/about/patents/

004-027-7890-00 R01 ECN_1614 Published 09/06/18

WINTERIZATION STACK PLUGS

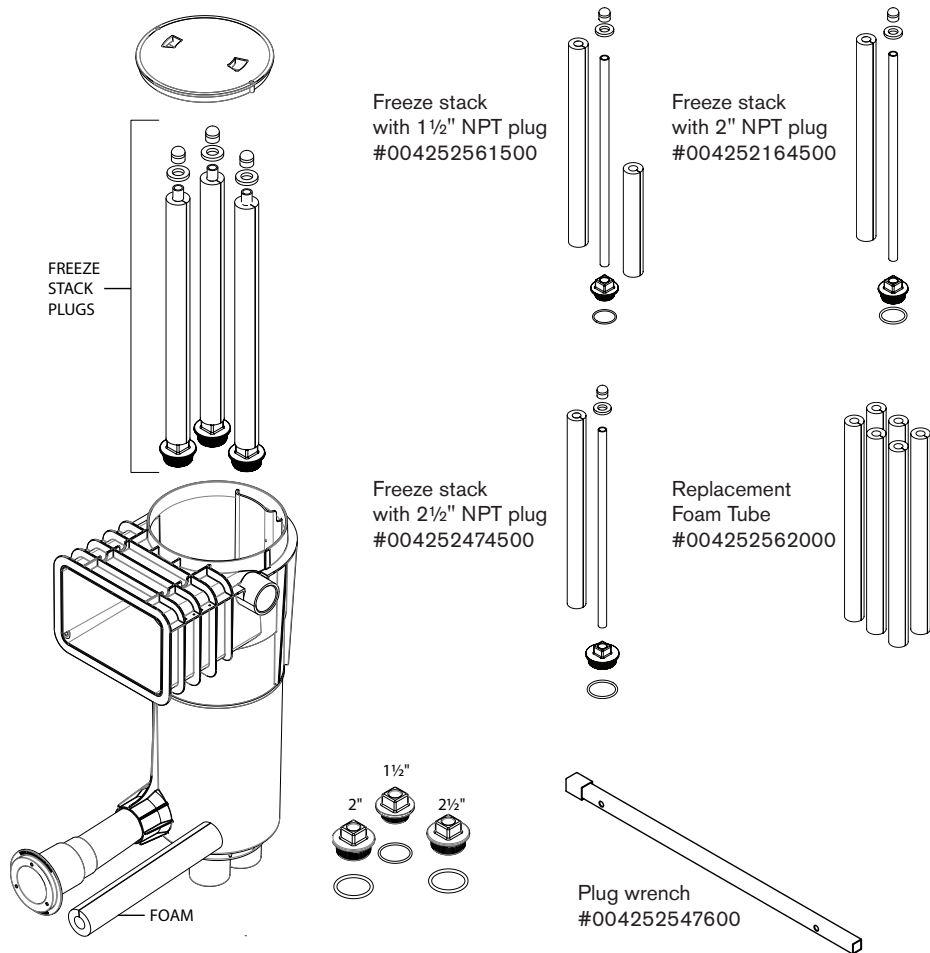

1. Select correct size plug for line to be winterized. Available 1 1/2", 2" and 2 1/2"
2. The plug includes an o-ring seal and is wrapped with Teflon tape for ease of installation and removal, thread into socket hand tight then use a wrench to tighten 1/2 to 1 additional turn.
3. The cap, washer and foam may be removed to use a plug wrench like Paramount #004252547600.
4. After the plug is tightened remove the cap and blow the line from the equipment.
5. Pour some antifreeze down the pipe and into the skimmer for added freeze protection.
6. Slide foam. Washer and cap on freeze stack to seal. **DO NOT GLUE** the cap to the stack.
7. The 1 1/2" version includes a length of foam to be used in the return pipe of a venturi skimmer.
8. The center pipe and foam of the freeze stack may be cut if it is too tall to put the deck access cover back on.

NOTICE

Additional methods may also be required. Refer to the ParaskimV manual. There are many methods to winterizing a pool and pool equipment. Different methods are used depending on regional conditions. It is the pool operator's responsibility to ensure all components of the pool and pool equipment are protected from the most severe freeze conditions in their specific area.