

MDX[®]
R3

VGB COMPLIANT DEBRIS DRAIN

MDX-R3 FOR FIBERGLASS POOLS OWNER'S MANUAL AND INSTALLATION GUIDE - AUSTRALIA

SUBMERGED SUCTION OUTLET
FOR MULTIPLE DRAIN USE FOR USE ON FLOOR



Safety compliant according to the Virginia Graeme Baker Pool and Spa Safety

Act ANSI/APSP - 16 - 2011

Compliant with ANSI/APSP - 7 - 2006.

NOTICE

To Installers: Read and follow these instructions. Give these instructions to the facility owner to keep for future reference. Follow all codes and regulations that apply to the design, installation and use of suction outlet fittings.

⚠ WARNING

MDX-R3 and SDX must be installed in accordance with Paramount's written instruction manual, and in conformity with applicable Federal, State, Local and Swimming pool industry building and safety codes.



Paramount

Pool Life. Simplified.®

295 East Corporate Place • Suite 100 • Chandler, AZ 85225

Phone: 0011 + 1 + 480.893.7607 • Fax: 0011 + 1 + 480.753.3397

Paramount@1Paramount.com • www.1Paramount.com

US and Foreign patents and patents pending see www.1paramount.com/about/patents/

Signal Words and Symbols Used In This Manual

This Owner's Manual and Installation Guide contains specific precautions and symbols to identify safety-related information. You will find DANGER, CAUTION, WARNING and NOTICE symbols which require special attention. Please read them carefully and follow these precautions as indicated! They will explain how to avoid hazards that may endanger you or persons using or maintaining your pool or spa.

DANGER

DANGER indicates a hazardous situation which, if not avoided, will result in death or serious injury.

WARNING

WARNING indicates a hazardous situation which, if not avoided, could result in death or serious injury.

CAUTION

CAUTION indicates a hazardous situation which, if not avoided, could result in minor or moderate injury.

NOTICE

NOTICE is used to address practices not related to physical injury.

PLEASE REVIEW THE OWNER'S MANUAL AND INSTALLATION GUIDE IN ITS ENTIRETY AND HEED ALL SAFETY INFORMATION. Failure to follow these instructions and warnings can result in DEATH OR SERIOUS INJURY.

SUCTION ENTRAPMENT HAZARD:

DANGER


DEATH or SERIOUS INJURY will result if a drain cover or grate is not installed and used correctly.

- Pool and spa pumps produce high levels of suction and move high volumes of water, which can cause death or serious injury if a person comes in close proximity to pool or spa drains.
- Keep clear of pool and spa drains to avoid death or serious injury from suction.

DANGER

DEATH or SERIOUS INJURY will result from hair entanglement or limb entrapment.

- Keep clear of pool and spa drains.
- Hair sucked into pool or spa drains will tangle and knot trapping the swimmer underwater. Avoid placing your hair near a pool or spa drain.
- Avoid sitting on pool or spa drains because the suction can cause severe intestinal damage, evisceration, and/or disembowelment.

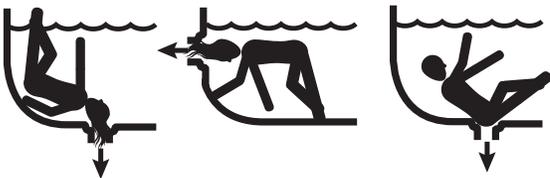


DANGER

DEATH or SERIOUS INJURY will result from pool or spa drain covers or grates that are improperly installed, missing, clogged, or broken.

- Inspect pool and spa regularly to insure that drain covers and grates are properly in place and secured.
- Ensure that drain covers are not damaged, cracked, broken, loose, clogged, not properly secured, or missing because these conditions increase the chance of death or serious injury from entrapment.
- If a drain cover is discovered damaged, cracked, broken, loose, clogged, not properly secured, or missing, you should:
 - o Close the pool or spa immediately; and,
 - o Post a closure notice and keep the pool or spa closed until an appropriate ANSI/APSP -16-2011 certified drain cover is properly installed.

DANGER

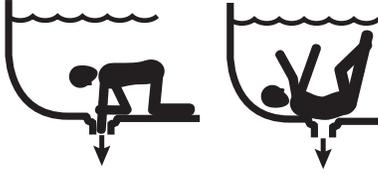

DEATH or **SERIOUS INJURY** will result from contact with a damaged, loose, or missing drain cover.

- Do not allow limbs to contact or be inserted into a drain pipe with a damaged, loose, or missing drain cover. This could result in swelling of the limb and/or trapping a swimmer underwater.
- Avoid mechanical entrapment of jewelry, swimsuit, hair decorations, finger, toe, or knuckle in a drain pipe with damaged, loose, or missing drain cover. This may result in trapping a swimmer underwater.
- Do not allow body to come into contact with a drain pipe that has a damaged, loose, or missing drain cover. This may result in trapping a swimmer underwater.

MAINTENANCE INSTRUCTIONS & WARNINGS:

WARNING

DEATH or **SERIOUS INJURY** can result from pool or spa drain covers or grates that are clogged by debris.

- All pool and spa drain covers may become obstructed by debris and should be cleaned periodically due to clogging from debris, such as pieces of plastic, hair, fabric, twigs, leaves, seeds, etc.
- The frequency of periodic cleaning will vary depending on the amount and type of debris introduced into the pool or spa
- Clogging of the drain cover will increase the suction effect and increase the likelihood of death or serious injury from those hazards listed above.
- A clogged drain can negatively affect the safety of the drain.
- It is advisable to have a qualified pool or spa professional perform this inspection and debris removal from the pool and spa drain covers.

Suction can pose a serious hazard to swimmers just as electricity can be a hazard. Both are important for proper water filtration and both must be treated with respect. Suction safety begins with a professional design that includes a quality suction system installed by a certified contractor.

The MDX-R3 VGB Compliant Debris Drain is only available to certified contractors for the same reason certified electricians are required to connect filtration pumps to public utilities; both require proper training and certification to assure no hidden hazards are built into the project.

Certified builders will address the following issues when designing and installing a proper filtration system:

- Properly bond-grounded pumps, time clocks, switches and any other metal in or near water. This is required to address Electrical Shock Hazards.
- Design the suction piping so there are no single-point suction hazards; single-point suction (one drain) is a leading cause of Body Suction Entrapment Hazards. Note: your certified builder has many effective options for addressing this hazard; they may include dual-drain systems, like MDX-R3, skimmers, gutters, negative edge features and many more products and piping designs known to professionals.
- Install ANSI/APSP - 16 - 2011 listed drains, suction covers and debris removal systems. This is the **ONLY** approved option for preventing Hair Entrapment Hazards, the leading cause of suction related injuries.
- Design and install an effective circulation system (including optional cleaning systems), to direct filtered water to all areas and interior surfaces. **NOTE:** Suction fittings can NOT clean or direct filtered water for proper sanitation; that can only be done on the pressure (return) side of the filtration system.

While suction injuries are extremely rare, drowning and diving injuries are far too common and there is little your certified builder can do to eliminate these hazards. You must educate yourself and your guests. Below are some important safety issues every swimmer must know and recognize.

- **PREVENT DROWNING:** Watch children at all times, no swimming alone.
- **NO DIVING IN SHALLOW WATER:** You can be permanently injured.
- **PREVENT SUCTION ENTRAPMENT:** Inspect suction covers before swimming, keep swimmers away from suction fittings, protect long hair, don't swim with loose clothing or large and dangling jewelry.

MDX-R3 SYSTEM DESIGN

WARNING

MDX-R3 and SDX must be installed in accordance with Paramount's written instruction manual, and in conformity with applicable Federal, State, Local and Swimming pool industry building and safety codes.

These MDX-R3 instructions provide methods with or without skimmer to choose from. Your local codes may require additional safety measures. Paramount Pool & Spa Systems and its representatives cannot recommend or endorse installation methods other than those provided in these MDX-R3 instructions.

NOTICE

Maximum Pump Size:

MDX-R3 is rated for a maximum of 132 GPM (500 LPM). While system flow rate will vary with pump size and the Total Head Loss for a given system, virtually any modern pump is capable of exceeding this limit, therefore it is the responsibility of the system designer to make sure it is not possible to exceed 132 GPM (500 LPM).

In the event of one suction outlet being completely blocked, the remaining suction outlets serving that system shall have a flow rating capable of the full flow of the pump(s) for the specific suction system.


NOTICE

The use of two 45° in place of a 90° allows for the best debris removal and minimizes large debris from getting caught in the line.

NOTICE

Plumbing of the included enlarged suction element (13" of 4" pipe) to the 4" port of the MDX-R3 is required. After the enlarged suction element, the included reducer adapter may then be used to reduce the pipe size to 2½". A 3" coupler may be attached to the outside diameter of the reducer or a 4" coupler directly to the enlarged suction element for systems where the flow through the MDX-R3 is intended to exceed 90 GPM. **Use of 2½" pipe minimum throughout the suction side of the system is strongly encouraged for optimum performance.** For your convenience, Paramount Pool & Spa Systems includes the enlarged suction element, and the reducer adapter with the MDX-R3. To order separately, please see page 11 for the part number.

MDXR3 ANTI-ENTRAPMENT DEBRIS DRAIN
STANDARD POOL DESIGN, AUSTRALIA
DUAL DRAIN

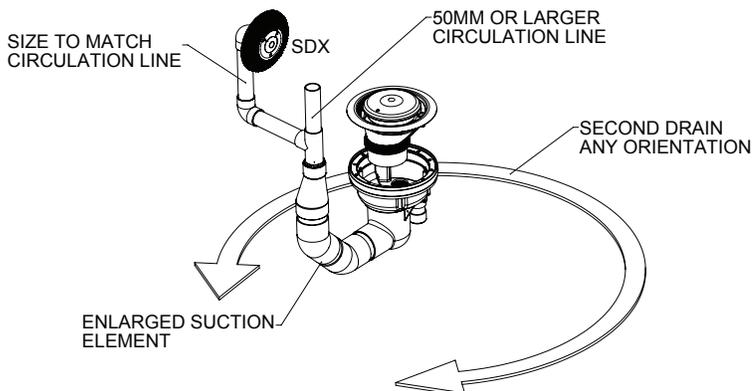

Design Flow Rate = 132 GPM (500 LPM)


Maximum GPM (LPM) = 132 (500)

Velocity at 132 GPM (500 LPM) = 1.294 FPS (.39 MPS)

0011 + 1 + 480.893.7607 or contact your regional representative.

For technical assistance call 0011 + 1 + 480.893.7607 or contact your regional representative.



FLOW HEAD LOSS CURVE

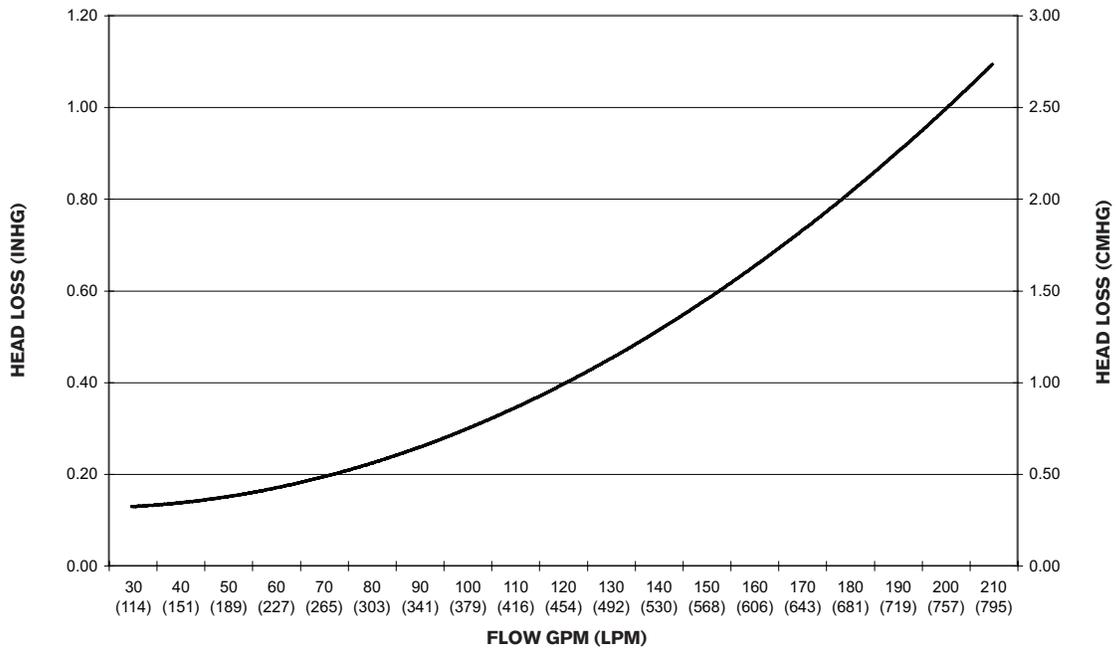



MDX-R3 INSTALLATION WHEN USING A SKIMMER

WITH CANISTER

WITHOUT CANISTER

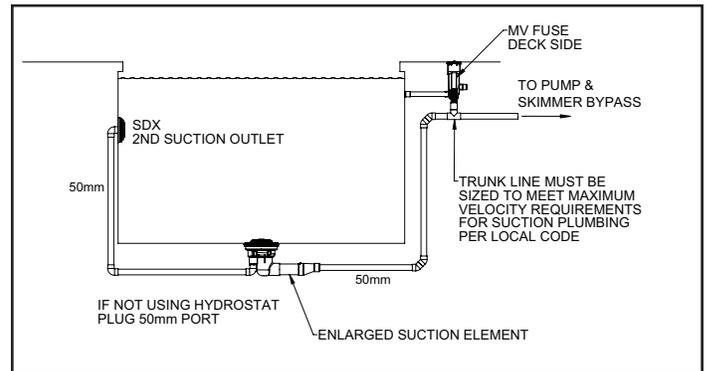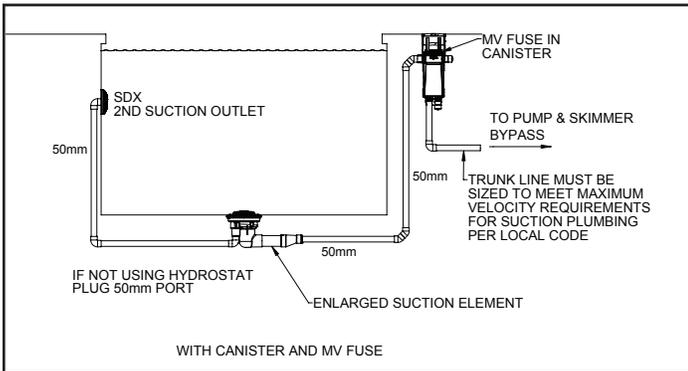

*Note: Canister requires 40mm equalizer line through pool wall. (Not Shown)

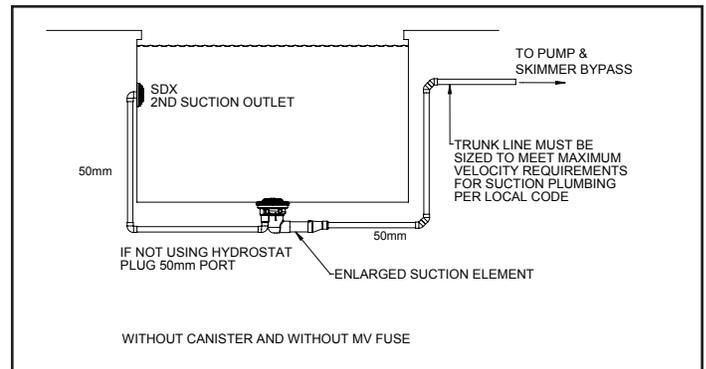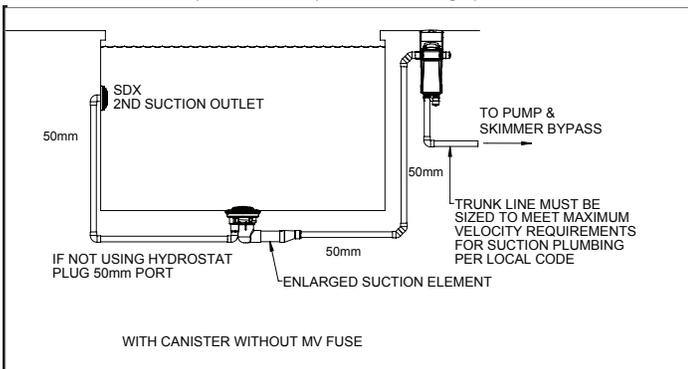


*Note: Canister requires 40mm equalizer line through pool wall. (Not Shown)


For technical assistance call 0011 + 1 + 480.893.7607 or contact your regional representative.

MDX-R3 INSTALLATION WITHOUT SKIMMER INSTALLED



WITH CANISTER

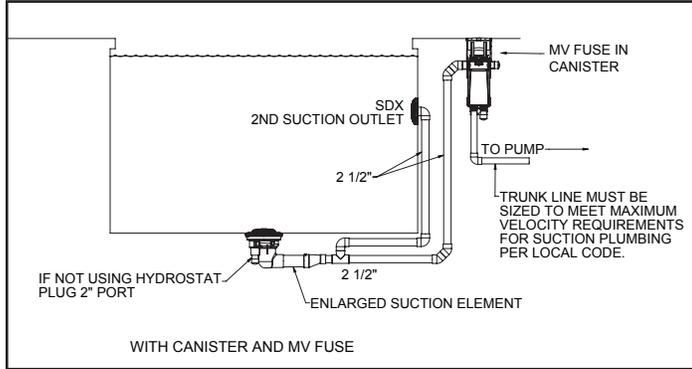

*Note: Canister requires 1 1/2" equalizer line through pool wall. (Not Shown)

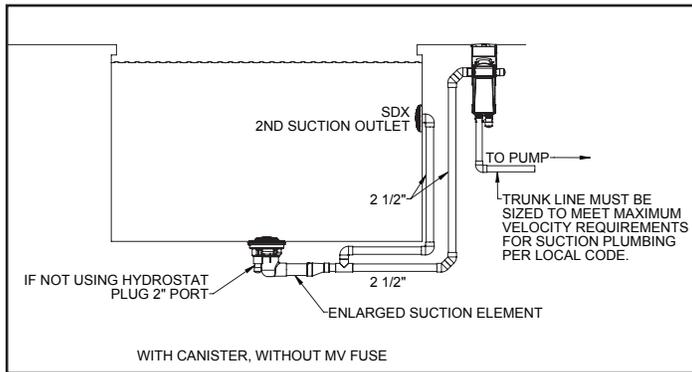


WITHOUT CANISTER

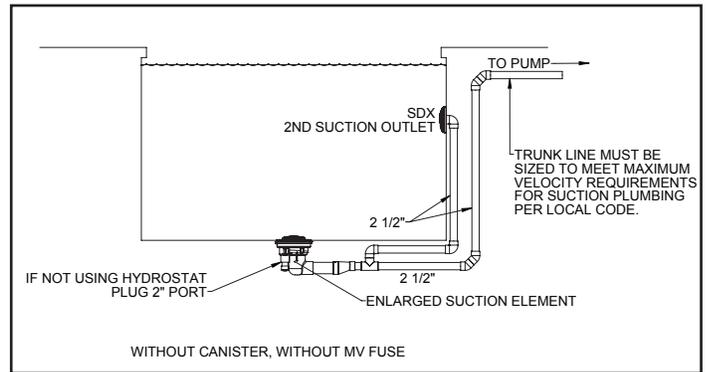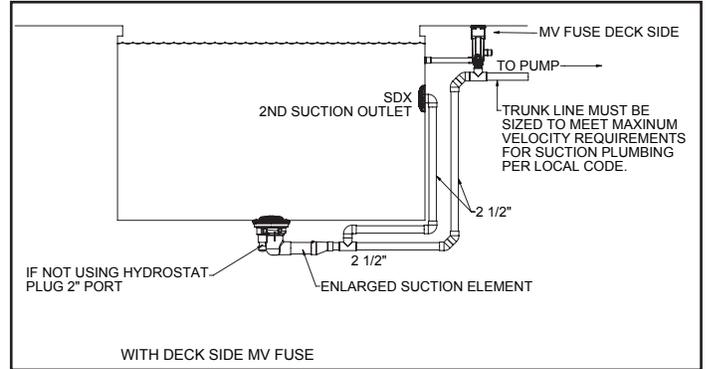


MDX-R3 INSTALLATION WITHOUT SKIMMER INSTALLED

WITH CANISTER


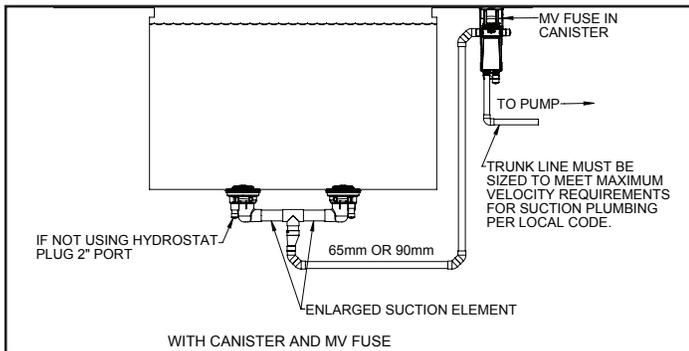


*Note: Canister requires 40mm equalizer line through pool wall. (Not Shown)

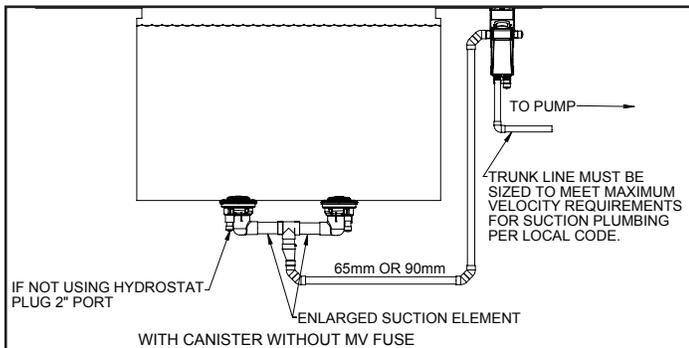

*Note: Canister requires 40mm equalizer line through pool wall. (Not Shown)


WITHOUT CANISTER

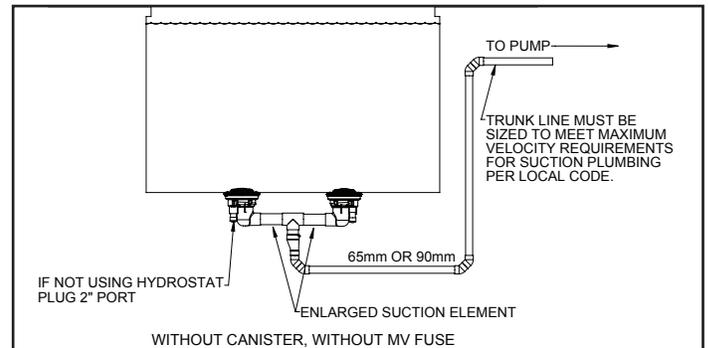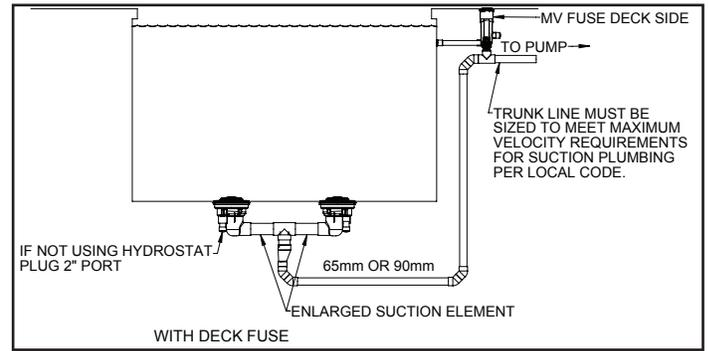

SUMP INSTALLATION TO SHELL

1. Apply sealing compound to top surface of MDX-R3 sump flange.
2. From outside of pool shell, align sump with screw holes in mounting ring and sweep ninety pointing to side of pool shell.
3. Install (12) 12 x 1" flat head screws every hole. **(Fig. 1)**
4. Secure 2nd Suction Outlet fitting through sidewall in desired locations.

Fig. 1

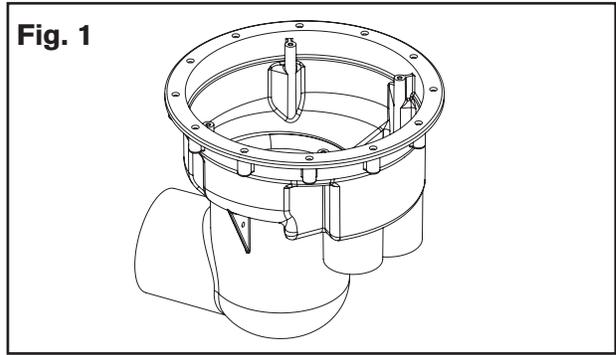

SDX Fiberglass Installation

1. Select the installation location for the SDX drain. (Additional SDX drain may be used.)
 2. **For Fiberglass Wall:** Cut one 4.5" (11.43 cm) hole using a 4.5" (11.43 cm) hole saw.
 3. Install the SDX Bulkhead Fitting with the "UP" arrow located at the top. **(Fig. 3)**
- For Fiberglass Shells: (Fig. 2)**
- a. Place the solid Gasket with the smooth side against the Bulkhead Fitting flange. (Silicone adhesive may be substituted for the Gasket if preferred.)
 - b. Mount the SDX Bulkhead Fitting in the hole with the UP arrow at the top of each fitting.
 - c. Secure with the SDX Nut.
4. Make plumbing connection between 2nd Suction Outlet and MDX-R3 Sump by connecting to side outlet of tee as shown in install methods 1 on page 2. Pipe must be equal diameter to circulation line.


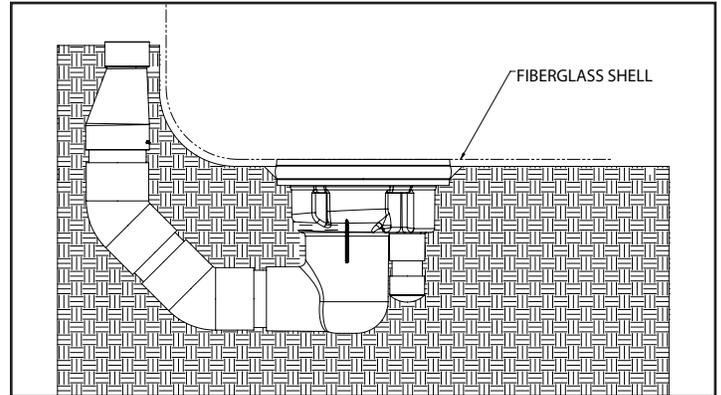





Fig. 3

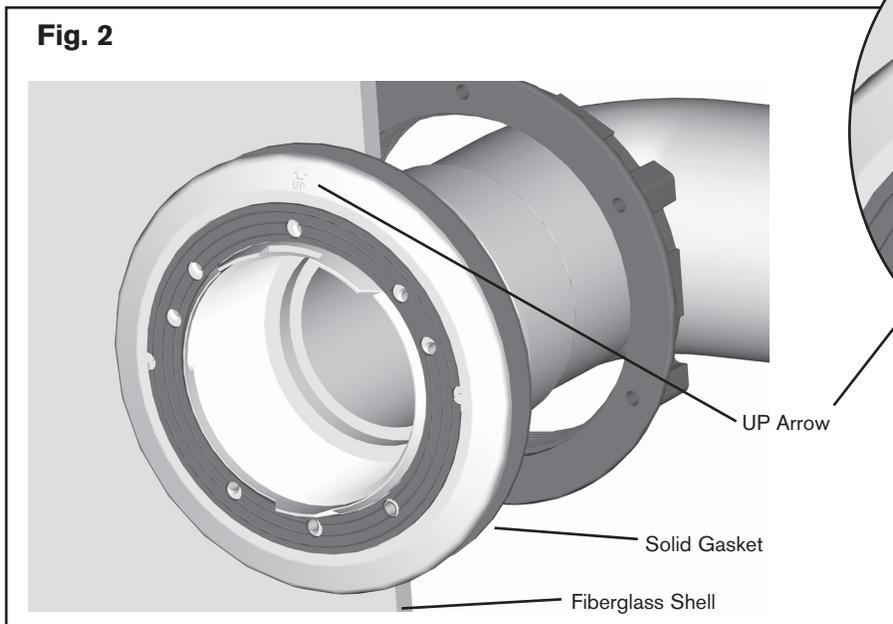

FIBERGLASS INSTALLATION

Fiberglass Cover Assembly (Fig. 4)

1. Prior to installing the Support, apply adhesive to the non-ribbed side of the two notched gaskets.
2. Align the gaskets with the alignment tabs and screw holes, then press the gaskets onto the Bulkhead Fitting and the Bulkhead Support.
3. Align the SDX Vinyl/Fiberglass Support with the alignment tab located at the top of the SDX Bulkhead Fitting. **(Fig. 3)**
4. Install five(5) self-tapping screws **(Fig. 5)** through the SDX Bulkhead Support with the T25 Security Screw Driver **(Fig. 6)**. Secure the screws without over tightening.
5. Align the SDX Cover with the SDX Support holes.
6. Install three (3) security screws through the SDX cover. Secure the screws without over tightening.

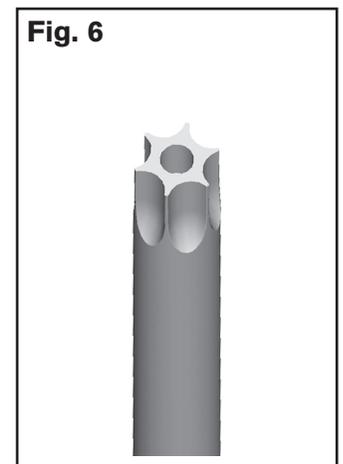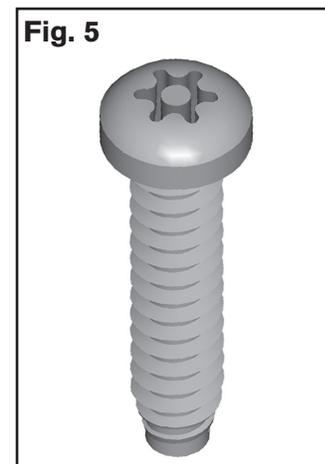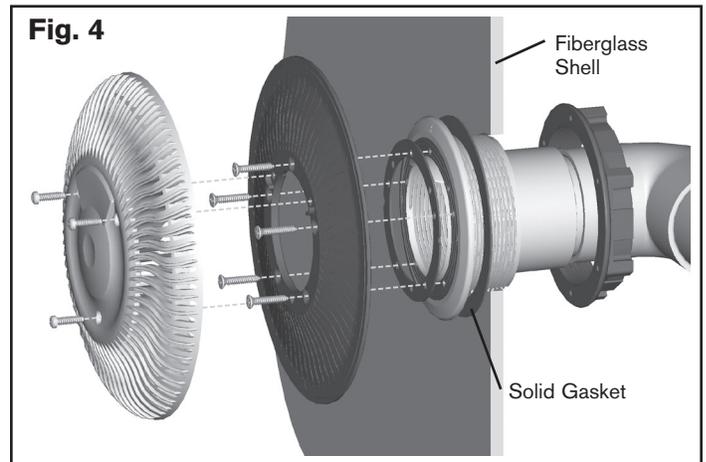


NOTICE

HYDROSTATIC FITTING: The hydrostatic port inside the MDX-R3 Sump is equivalent to a 2" Threaded Female Adapter and a 63mm Slip Fitting Outside the MDX-R3 Sump. This port is for the purpose of a hydrostat only. Paramount recommends the use of the 2" thread plug provided. Do not use check valves here that are prone to sticking open causing the need to open the drain cover exposing a suction risk. If a hydrostat is not used, plug this port from bottom with pipe and cap. Do not install any suction equipment (pump) to this port!

SUMP INSTALLATION


SUMP INSTALLATION TO SHELL BEFORE SETTING POOL

Fig. 7

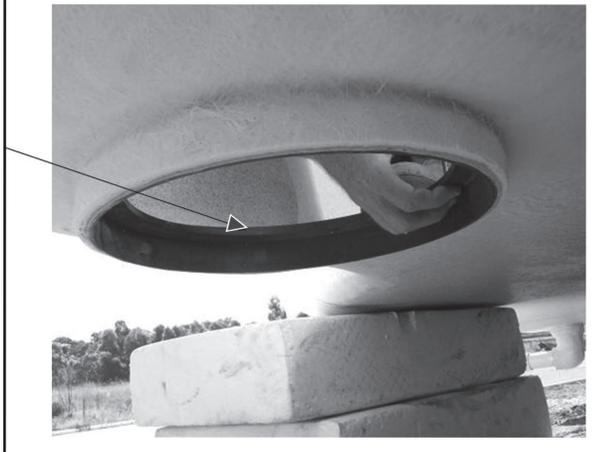

1. Sand and clean this bottom surface area well (see arrow). This is where the gasket will seal. **(Fig. 7)**
2. Glue gaskets to the face of the sump with RTV Silicon glue. Be sure to line up all gasket holes with the corresponding hole in the sump. **(Fig. 8)**

Fig. 8

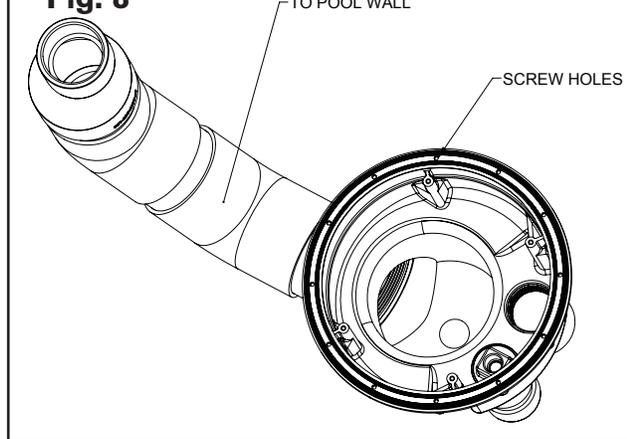

3. Line up ninety of the sump to face the side of the pool. Using two people or by reaching thru from the inside of the pool position the sump so the screw holes line up keeping the sweep ninety facing the side of the pool. Using the 12 flathead screws affix the sump to the mounting ring. **(Fig. 8)**

MDX-R3 PRESSURE TESTING

Pressure Test-READ BEFORE INSTALLATION: New Style Test Plug

The 4" pressure test plugs (005-252-1610-00) use an o-ring to make the seal.

Wrap once with Teflon tape to prevent plastic threads from binding. Insert plug into threaded socket. Use an adjustable wrench, a 1 1/2" 12pt socket or pliers on lug and tighten by hand until snug. Over tightening may cause parts to break.


Pressure should remain on the system through construction until right before filling with water.

Assemble the Drain PRIOR to Adding Water - See Illustration on Page 9:

1. Remove 4" pressure plug.
2. Install funnel assembly (#3) onto sump (#9) and secure with 4 (four) security screws (#2) with screw driver security T25 (#24).

With Pressure Plugs

Fig. 9

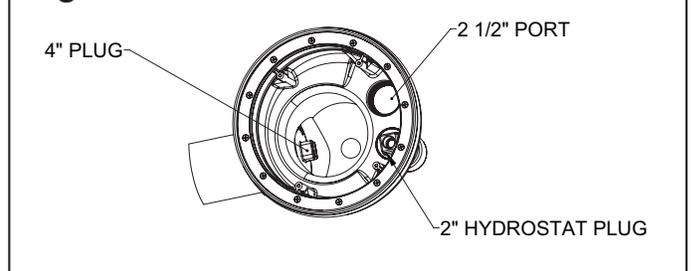

WARNING

Release pressure on the system before removing plugs

3. Install the cover (#1) onto the funnel assembly (#3) and secure with 3 (three) security screws (#2).

MDX-R3 FIBERGLASS WINTERIZATION

WITH CANISTER

If vacuum relief suction outlets are located below freeze line skip steps 1 and 2.

1. Remove grate from second suction and install a 13-3/4 blow through plug and blow line to achieve airlock.
2. If 3rd suction line is installed remove grate, install 13-3/4 blow-through plug and blow line to achieve airlock.
3. Go to canister instructions step 1 - 5 below.
4. If vent tube is installed, install blow through plug and blow line to achieve airlock. Repeat vacuum out canister. Then complete canister step 5.

WITHOUT CANISTER

If vacuum relief suction outlets are located below freeze line skip steps 1 and 2.

1. Remove grate from second suction and install 13-3/4 blow through plug and blow line to achieve airlock.
2. If 3rd suction line is installed remove grate, install 13-3/4 blow-through plug and blow line to achieve airlock.
3. If vent line is installed in main suction line, plug vent line and install blow through plug in pump inlet and blow line to achieve airlock.
4. Lastly, blow vent line to achieve airlock.

VENT TUBE WARNING LABELS

Included in each MDX-R3 are two warning labels that need to be placed on the pool equipment if the pool is to be winterized and has a vent tube on any of the drains plumbed on the pool. Attach the smaller label to the vent pipe where it terminates to atmosphere. (See Fig. 9)

Attach the larger label to the control panel next to the controller for the pump with the vent tube plumbed to it. (See Fig. 10)


Fig. 9



Fig. 10



Replace within 05 installed years

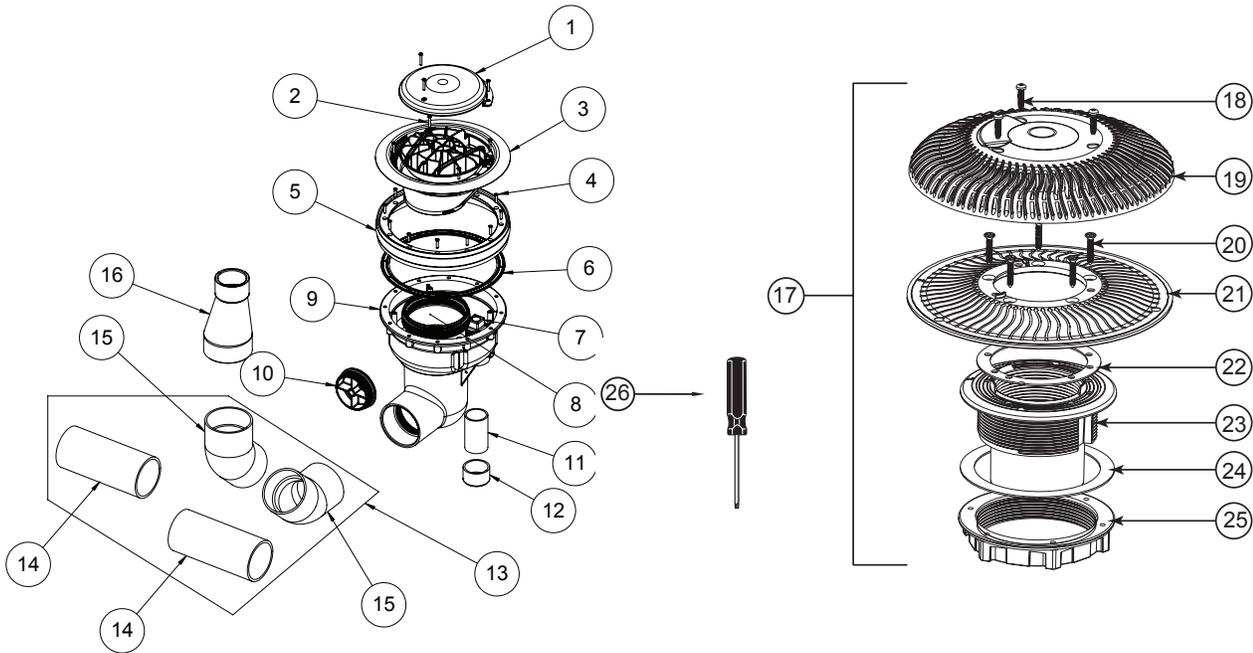

Item	Part Number	Description	
1	005-252-2110-XX	Cover (XX = Color Code)	
2	**	Screw No. 10 X 7/8 Security Head	
3	005-252-8234-XX	Funnel Assembly (Includes Support, Cover Screw and Adapter)	**
4	**	Screw No. 12 X 1 Pil Flt Hd.	
5*	005-252-2048-00	Mounting Ring	
6	005-252-0010-00	Gasket Vinyl (2 pcs)	
7	005-252-1605-00	Plug 2" NPT (6 pcs)	
8	005-252-1045-00	Funnel Adapter	
9	005-252-2009-00	Sump	
10	005-252-1610-00	4" Plug with O-Ring	
11*	**	50mm Pipe - Not Included - Cap If Not Used	
12*	**	50mm Cap - Not Included - Cap If Not Used	
13	005-252-5524-00	Enlarged Suction Element	
14	**	Pipe 10" Long	
15	**	4" Elbows	
16	005-252-2550-00	Coupler Reducer 4" X 2 1/2"/3"	
*	005-282-0842-00	Screw Pack Fiber (19 pc)	
17	004-182-2212-XX	SDX High Flow Safety Drain - Fiberglass (2 pk) (XX = Color Code)	
18	005-252-0821-00	Screw: 10 X 1 1/4" TORX W/PIN SS B (12 pcs)	
19	005-252-2086-XX	SDX Cover w/ Screws Vinyl/Fiberglass	
20	005-252-0816-00	Screw: 12-14 X 1" B (12 pcs)	
21	005-252-2068-00	SDX Support Vinyl/Fiberglass	
22	005-252-0072-00	SDX Gasket Vinyl/Fiberglass	
23	005-252-2035-00	SDX Bulkhead Vinyl/Fiberglass 2 1/2"	
24	005-252-0074-00	SDX Bulkhead Gasket Fiberglass	
25	005-252-2090-00	SDX Bulkhead Nut	
26	005-252-0895-00	T25 Security Screw Driver	

* Not part of MDX-R3

For technical assistance call 0011 + 1 + 480.893.7607 or contact your regional representative.

