

VGB COMPLIANT DEBRIS DRAIN

MDX-R3 FOR VINYL POOLS OWNER'S MANUAL AND INSTALLATION GUIDE - AUSTRALIA

SUBMERGED SUCTION OUTLET
FOR MULTIPLE DRAIN USE FOR USE ON FLOOR



Safety compliant according to the Virginia Graeme Baker Pool and Spa Safety

Act ANSI/APSP - 16 - 2011

Compliant with ANSI/APSP - 7 - 2006.

NOTICE

To Installers: Read and follow these instructions. Give these instructions to the facility owner to keep for future reference. Follow all codes and regulations that apply to the design, installation and use of suction outlet fittings.

WARNING

MDX-R3 and SDX must be installed in accordance with Paramount's written instruction manual, and in conformity with applicable Federal, State, Local and Swimming pool industry building and safety codes.



Paramount

Pool Life. Simplified.

295 East Corporate Place • Suite 100 • Chandler, AZ 85225

Toll Free: 1.800.621.5886 • Phone: 480.893.7607 • Fax: 480.753.3397

Paramount@1Paramount.com • www.1Paramount.com

US and Foreign patents and patents pending see www.1paramount.com/about/patents/

004-027-8821-00

REV032515

Signal Words and Symbols Used In This Manual

This Owner's Manual and Installation Guide contains specific precautions and symbols to identify safety-related information. You will find DANGER, CAUTION, WARNING and NOTICE symbols which require special attention. Please read them carefully and follow these precautions as indicated! They will explain how to avoid hazards that may endanger you or persons using or maintaining your pool or spa.

DANGER

DANGER indicates a hazardous situation which, if not avoided, will result in death or serious injury.

WARNING

WARNING indicates a hazardous situation which, if not avoided, could result in death or serious injury.

CAUTION

CAUTION indicates a hazardous situation which, if not avoided, could result in minor or moderate injury.

NOTICE

NOTICE is used to address practices not related to physical injury.

PLEASE REVIEW THE OWNER'S MANUAL AND INSTALLATION GUIDE IN ITS ENTIRETY AND HEED ALL SAFETY INFORMATION. Failure to follow these instructions and warnings can result in DEATH OR SERIOUS INJURY.

SUCTION ENTRAPMENT HAZARD:

DANGER


DEATH or SERIOUS INJURY will result if a drain cover or grate is not installed and used correctly.

- Pool and spa pumps produce high levels of suction and move high volumes of water, which can cause death or serious injury if a person comes in close proximity to pool or spa drains.
- Keep clear of pool and spa drains to avoid death or serious injury from suction.

DANGER

DEATH or SERIOUS INJURY will result from hair entanglement or limb entrapment.

- Keep clear of pool and spa drains.
- Hair sucked into pool or spa drains will tangle and knot trapping the swimmer underwater. Avoid placing your hair near a pool or spa drain.
- Avoid sitting on pool or spa drains because the suction can cause severe intestinal damage, evisceration, and/or disembowelment.

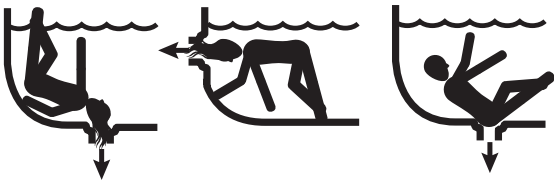


DANGER

DEATH or SERIOUS INJURY will result from pool or spa drain covers or grates that are improperly installed, missing, clogged, or broken.

- Inspect pool and spa regularly to insure that drain covers and grates are properly in place and secured.
- Ensure that drain covers are not damaged, cracked, broken, loose, clogged, not properly secured, or missing because these conditions increase the chance of death or serious injury from entrapment.
- If a drain cover is discovered damaged, cracked, broken, loose, clogged, not properly secured, or missing, you should:
 - o Close the pool or spa immediately; and,
 - o Post a closure notice and keep the pool or spa closed until an appropriate ANSI/APSP -16-2011 certified drain cover is properly installed.

DANGER

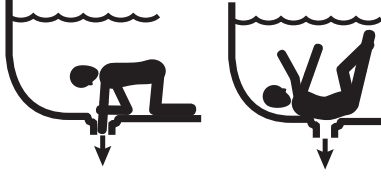

DEATH or **SERIOUS INJURY** will result from contact with a damaged, loose, or missing drain cover.

- Do not allow limbs to contact or be inserted into a drain pipe with a damaged, loose, or missing drain cover. This could result in swelling of the limb and/or trapping a swimmer underwater.
- Avoid mechanical entrapment of jewelry, swimsuit, hair decorations, finger, toe, or knuckle in a drain pipe with damaged, loose, or missing drain cover. This may result in trapping a swimmer underwater.
- Do not allow body to come into contact with a drain pipe that has a damaged, loose, or missing drain cover. This may result in trapping a swimmer underwater.

MAINTENANCE INSTRUCTIONS & WARNINGS:

WARNING

DEATH or **SERIOUS INJURY** can result from pool or spa drain covers or grates that are clogged by debris.

- All pool and spa drain covers may become obstructed by debris and should be cleaned periodically due to clogging from debris, such as pieces of plastic, hair, fabric, twigs, leaves, seeds, etc.
- The frequency of periodic cleaning will vary depending on the amount and type of debris introduced into the pool or spa
- Clogging of the drain cover will increase the suction effect and increase the likelihood of death or serious injury from those hazards listed above.
- A clogged drain can negatively affect the safety of the drain.
- It is advisable to have a qualified pool or spa professional perform this inspection and debris removal from the pool and spa drain covers.

Suction can pose a serious hazard to swimmers just as electricity can be a hazard. Both are important for proper water filtration and both must be treated with respect. Suction safety begins with a professional design that includes a quality suction system installed by a certified contractor.

The MDX-R3 VGB Compliant Debris Drain is only available to certified contractors for the same reason certified electricians are required to connect filtration pumps to public utilities; both require proper training and certification to assure no hidden hazards are built into the project.

Certified builders will address the following issues when designing and installing a proper filtration system:

- Properly bond-grounded pumps, time clocks, switches and any other metal in or near water. This is required to address Electrical Shock Hazards.
- Design the suction piping so there are no single-point suction hazards; single-point suction (one drain) is a leading cause of Body Suction Entrapment Hazards. Note: your certified builder has many effective options for addressing this hazard; they may include dual-drain systems, like MDX-R3, skimmers, gutters, negative edge features and many more products and piping designs known to professionals.
- Install ANSI/APSP - 16 - 2011 listed drains, suction covers and debris removal systems. This is the **ONLY** approved option for preventing Hair Entrapment Hazards, the leading cause of suction related injuries.
- Design and install an effective circulation system (including optional cleaning systems), to direct filtered water to all areas and interior surfaces. **NOTE:** Suction fittings can **NOT** clean or direct filtered water for proper sanitation; that can only be done on the pressure (return) side of the filtration system.

While suction injuries are extremely rare, drowning and diving injuries are far too common and there is little your certified builder can do to eliminate these hazards. You must educate yourself and your guests. Below are some important safety issues every swimmer must know and recognize.

- **PREVENT DROWNING:** Watch children at all times, no swimming alone.
- **NO DIVING IN SHALLOW WATER:** You can be permanently injured.
- **PREVENT SUCTION ENTRAPMENT:** Inspect suction covers before swimming, keep swimmers away from suction fittings, protect long hair, don't swim with loose clothing or large and dangling jewelry.

MDX-R3 SYSTEM DESIGN

WARNING

MDX-R3 and SDX must be installed in accordance with Paramount's written instruction manual, and in conformity with applicable Federal, State, Local and Swimming pool industry building and safety codes.

These MDX-R3 instructions provide two methods to choose from, with additional methods for specific jurisdictions, (California specifically but not limited to that state). Your local codes may require additional safety measures. Paramount Pool & Spa Systems and its representatives cannot recommend or endorse installation methods other than those provided in these MDX-R3 instructions.

NOTICE

Maximum Pump Size:

MDX-R3 is rated for a maximum of 132 GPM (500 LPM). While system flow rate will vary with pump size and the Total Head Loss for a given system, virtually any modern pump is capable of exceeding this limit, therefore it is the responsibility of the system designer to make sure it is not possible to exceed 132 GPM (500 LPM).

In the event of one suction outlet being completely blocked, the remaining suction outlets serving that system shall have a flow rating capable of the full flow of the pump(s) for the specific suction system.


NOTICE

The use of two 45° in place of a 90° allows for the best debris removal and minimizes large debris from getting caught in the line.

NOTICE

Plumbing of the included enlarged suction element (13" of 4" pipe) to the 4" port of the MDX-R3 is required. After the enlarged suction element, the included reducer adapter may then be used to reduce the pipe size to 2½". A 3" coupler may be attached to the outside diameter of the reducer or a 4" coupler directly to the enlarged suction element for systems where the flow through the MDX-R3 is intended to exceed 90 GPM. **Use of 2½" pipe minimum throughout the suction side of the system is strongly encouraged for optimum performance.** For your convenience, Paramount Pool & Spa Systems includes the enlarged suction element, and the reducer adapter with the MDX-R3. To order separately, please see page 10 for the part number.

MDX-R3 VGB COMPLIANT DEBRIS DRAIN
STANDARD POOL DESIGN
DUAL DRAIN

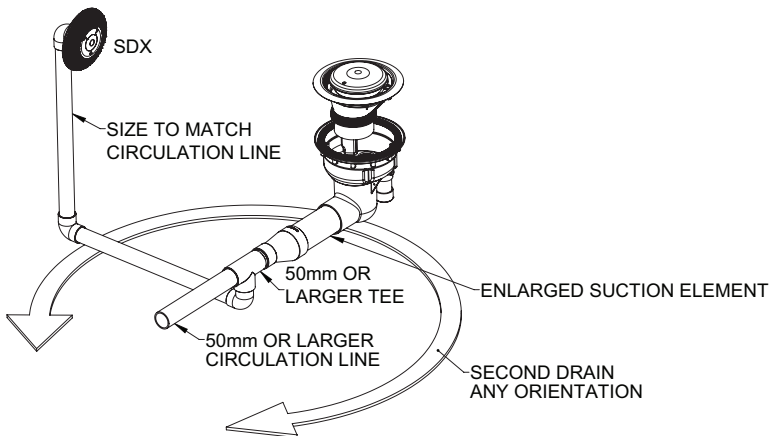

Design Flow Rate = 132 GPM (500 LPM)

Maximum GPM (LPM) = 132 (500)

Velocity Through Cover


Opening at 132 GPM (500 LPM) = 1.294 FPS (.39 MPS)

For technical assistance call
1-800-621-5886 or contact your
regional representative.

For technical assistance call 1-800-621-5886 or contact your regional representative.

© 2010, Paramount Pool & Spa Systems

FLOW HEAD LOSS CURVE


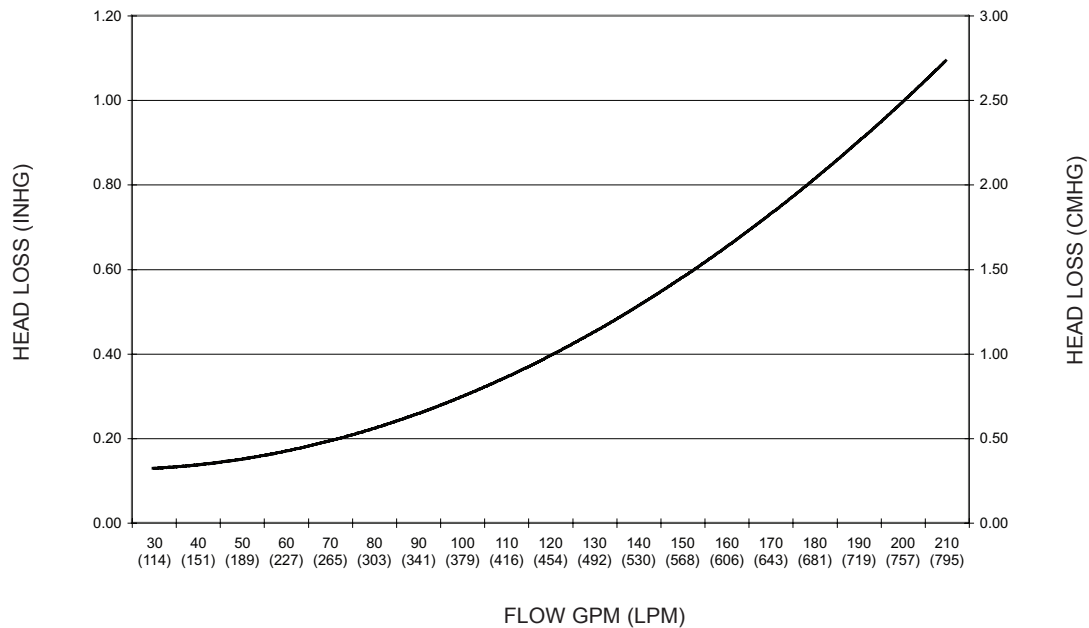


MDX-R3 INSTALLATION



WITH CANISTER

WITHOUT CANISTER

Installation Method 1:

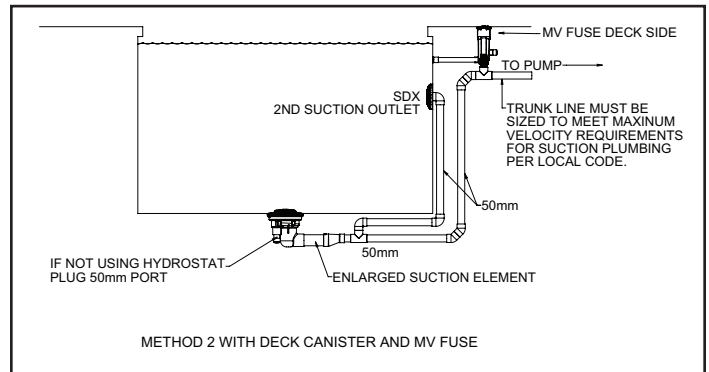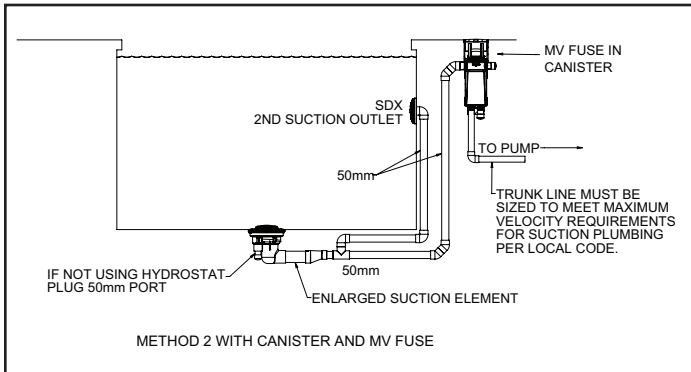

*Note: Canister requires 40mm equalizer line through pool wall. (Not Shown)

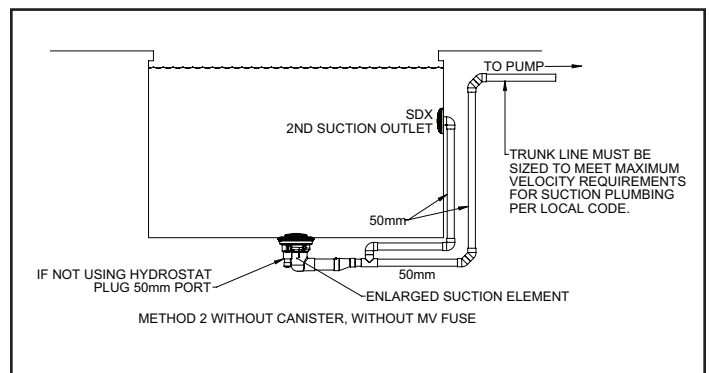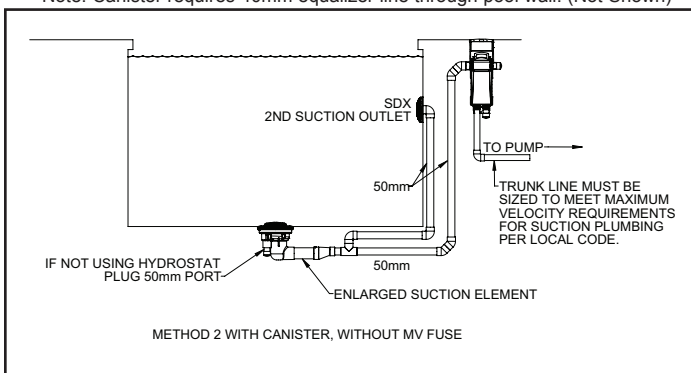

*Note: Canister requires 40mm equalizer line through pool wall. (Not Shown)


For technical assistance call 1-800-621-5886 or contact your regional representative.

MDX-R3 INSTALLATION



WITH CANISTER

WITHOUT CANISTER


Installation Method 2:

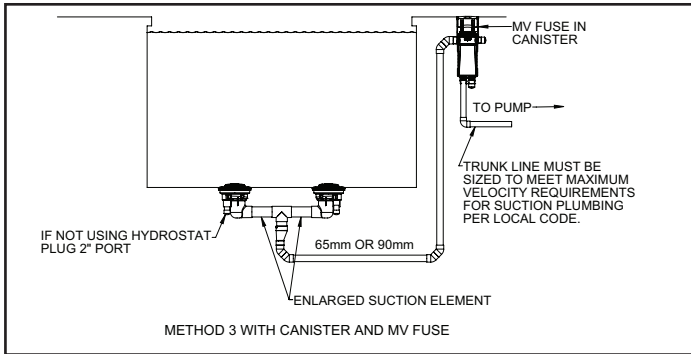

*Note: Canister requires 40mm equalizer line through pool wall. (Not Shown)

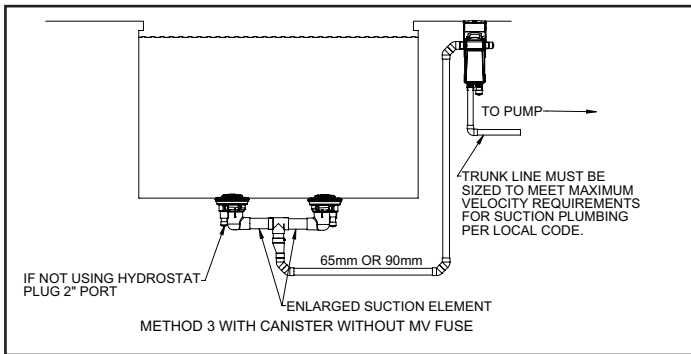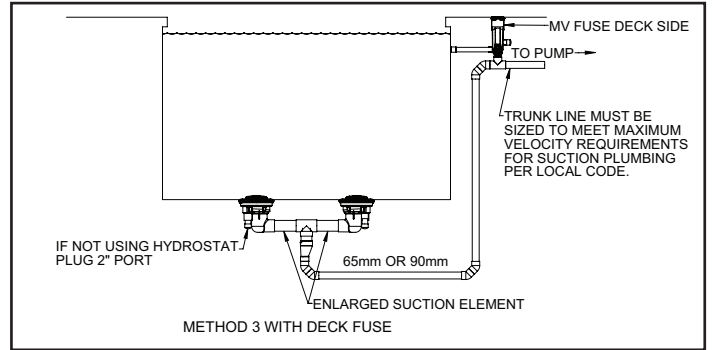


*Note: Canister requires 40mm equalizer line through pool wall. (Not Shown)

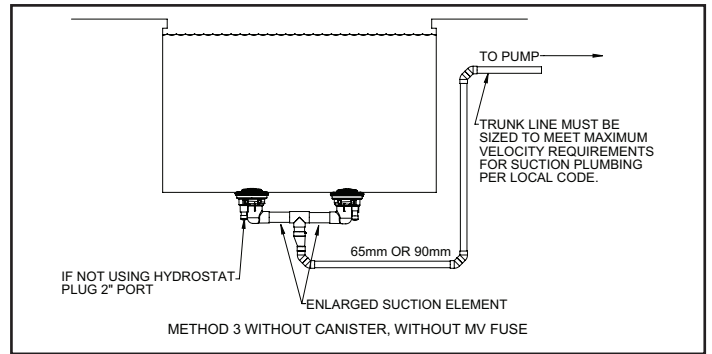

MDX-R3 INSTALLATION

MDX-R3 Plumbing (Fig. 1)

1. Position the MDX-R3 Sump even with the finished depth of the pool, spa or basin (**Fig. 1**). Orientate the sump so the elbow is perpendicular to inside wall or end wall of pool. Whichever pool base is used, the drain sump must be encased in concrete as shown to anchor it in place.
2. Position the REQUIRED SDX High Flow Safety Drain® on a sidewall of the pool below water level (if pool will be winterized, place it high enough to reach from the deck). Option: The SDX High Flow Safety Drain may be positioned on the floor a MINIMUM of one (1) meter away from any other Suction Outlet.

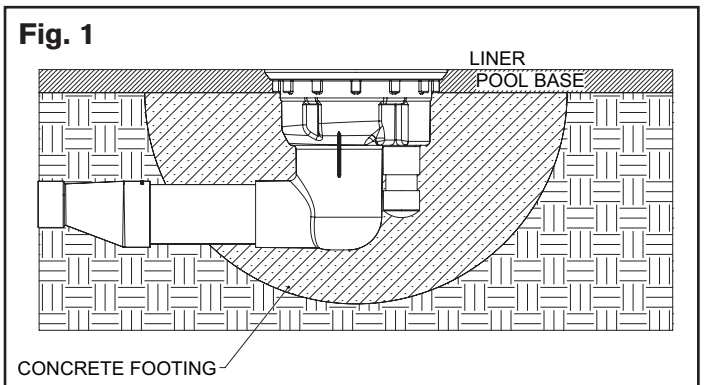

HYDROSTATIC FITTING: The hydrostatic port inside the MDX-R3 Sump is equivalent to a 2" Threaded Female Adapter and a 50mm Slip Fitting Outside the MDX-R3 Sump. This port is for the purpose of a hydrostat only. Paramount recommends the use of the 2" thread plug provided. Do not use check valves here that are prone to sticking open causing the need to open the drain cover exposing a suction risk. If a hydrostat is not used, plug this port from bottom with pipe and cap. Do not install any suction equipment (pump) to this port!

MDX-R3 VINYL PRESSURE TESTING


Pressure Test-READ BEFORE INSTALLATION: New Style Test Plug

The 4" pressure test plugs (005-252-1610-00) use an o-ring to make the seal.

Wrap once with Teflon tape to prevent plastic threads from binding. Insert plug into threaded socket. Use an adjustable wrench, a 1 1/2" 12 pt socket or pliers on lug and tighten by hand until snug. Over tightening may cause parts to break.

Pressure should remain on the system through construction until interior cleanup.

Fig. 2

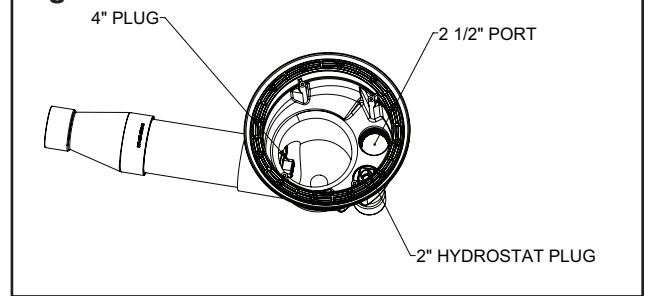

WARNING

Release pressure on the system before removing plugs

MDX-R3 VINYL INSTALLATION

Pool Base Install

Finish pool base even with upper edge of MDX-R3 sump (**Fig. 1**).

Liner Install


1. Make sure bottom gasket is in place before installing liner.
2. Set liner in pool and draw tight with vacuum.
3. Install top gasket, seal ring and 12 screws.
4. Cut out liner inside of sump. Be sure to trim liner right up to the inside diameter of seal ring.

Assemble the Drain PRIOR to Adding Water - See Illustration on Page 10 for Reference:

1. Remove 4" pressure plug (#10).
2. Install funnel assembly (#3) onto sump (#9) and secure with 4 (four) security screws (#2) with screw driver security T25 (#24).
3. Install the cover (#1) onto the funnel assembly (#3) and secure with 3 (three) security screws (#2).

SDX VINYL INSTALLATION





1. Select the installation location for the SDX drain.
(Additional SDX drains may be used.)
2. **For Steel Wall:** Make one 4½" hole using a Greenlee® Standard Round Knockout Punch (Greenlee.com - Cat. No. 742BB / UPC No. 19978)
For Plastic Wall: Cut one 114mm hole using a 114mm hole saw.
For Concrete Wall: Embed one SDX Bulkhead fitting. Protect vinyl liner mounting surface from concrete and align the back of the flange with the interior surface to allow room for rolled foam around the fitting.
3. Install the SDX Bulkhead Fittings with the "UP" arrow located at the top. **(Fig. 3)**
 - a. Discard the Solid Gasket used for fiberglass shells.
 - b. Mount the SDX Bulkhead Fittings in the wall with the UP arrows at the top.
 - c. Secure with the SDX Nut. (Not needed for concrete walls.)
4. Connect the pipe to the secondary outlet of the MDX-R3.

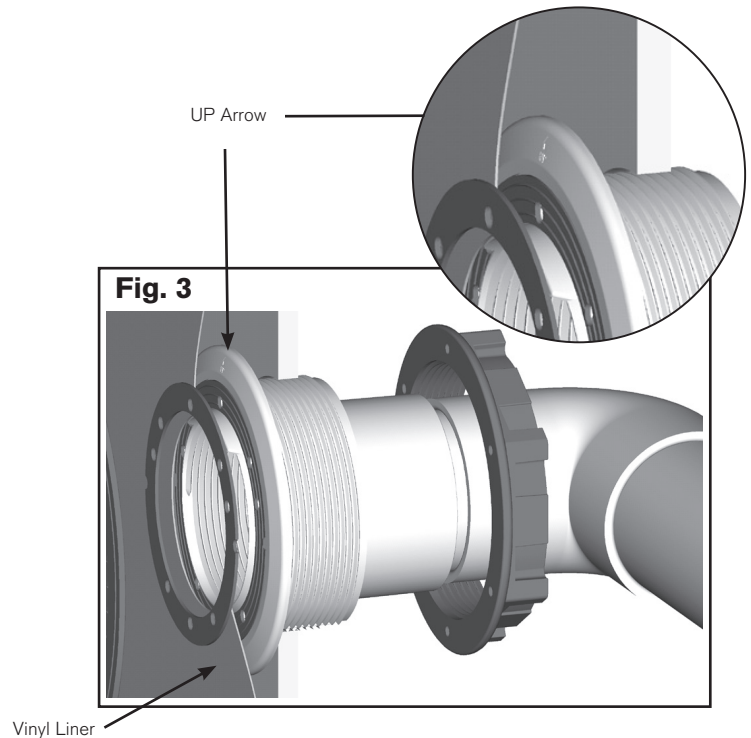

SDX VINYL INSTALLATION (CONTINUED)

Vinyl Cover Assembly (Fig. 4)

1. Prior to installing the Vinyl Liner, apply adhesive to the non-ribbed side of the two notched gaskets.
2. Align the gaskets with the alignment tabs and screw holes, then press the gaskets onto the Bulkhead Fitting and the Bulkhead Support.
3. After installing the Vinyl Liner, align the SDX Vinyl/Fiberglass Support with the alignment tab located at the top and bottom of the SDX Bulkhead Fitting. **(Fig. 5)**
4. Install five (5) self-tapping screws **(Fig. 6)** through the SDX Bulkhead Support with the T25 Security Screwdriver **(Fig. 7)**. Secure the screws without over tightening.
5. Cut the Vinyl Liner out of the center of the SDX Bulkhead Supports to expose the suction piping.
6. Align the SDX Cover with the SDX Support holes.
7. Install three (3) security screws through the SDX cover. Secure the screws without over tightening.

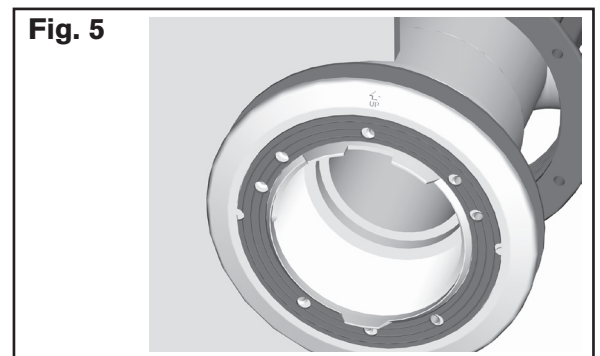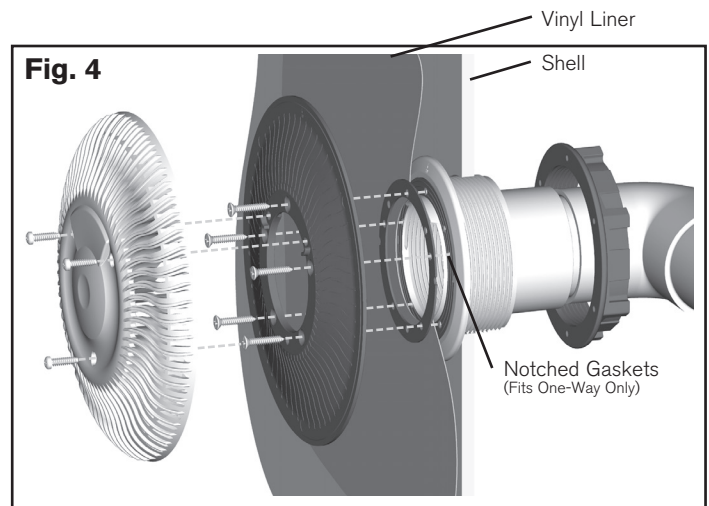

MDX-R3 VINYL WINTERIZATION

WITH CANISTER

If vacuum relief suction outlets are located below freeze line skip steps 1 and 2.

1. Remove grate from second suction and install a 13-3/4 blow through plug and blow line to achieve airlock.
2. If 3rd suction line is installed remove grate, install a 13-3/4 blow-through plug and blow line to achieve airlock.
3. Go to canister instructions step 1 - 5 below.
4. If vent tube is installed, install blow through plug and blow line to achieve airlock. Repeat vacuum out canister. Then complete canister step 5.

VENT TUBE WARNING LABELS

Included in each MDX-R3 are two warning labels that need to be placed on the pool equipment if the pool is to be winterized and has a vent tube on any of the drains plumbed on the pool. Attach the smaller label to the vent pipe where it terminates to atmosphere. (See Fig. 9)

Attach the larger label to the control panel next to the controller for the pump with the vent tube plumbed to it. (See Fig. 10)

WITHOUT CANISTER

If vacuum relief suction outlets are located below freeze line skip steps 1 and 2.

1. Remove grate from second suction and install a 13-3/4 blow through plug and blow line to achieve airlock.
2. If 3rd suction line is installed remove grate, install a 13-3/4 blow-through plug and blow line to achieve airlock.
3. If vent line is installed in main suction line, plug vent line and install blow through plug in pump inlet and blow line to achieve airlock.
4. Lastly, blow vent line to achieve airlock.

Fig. 9

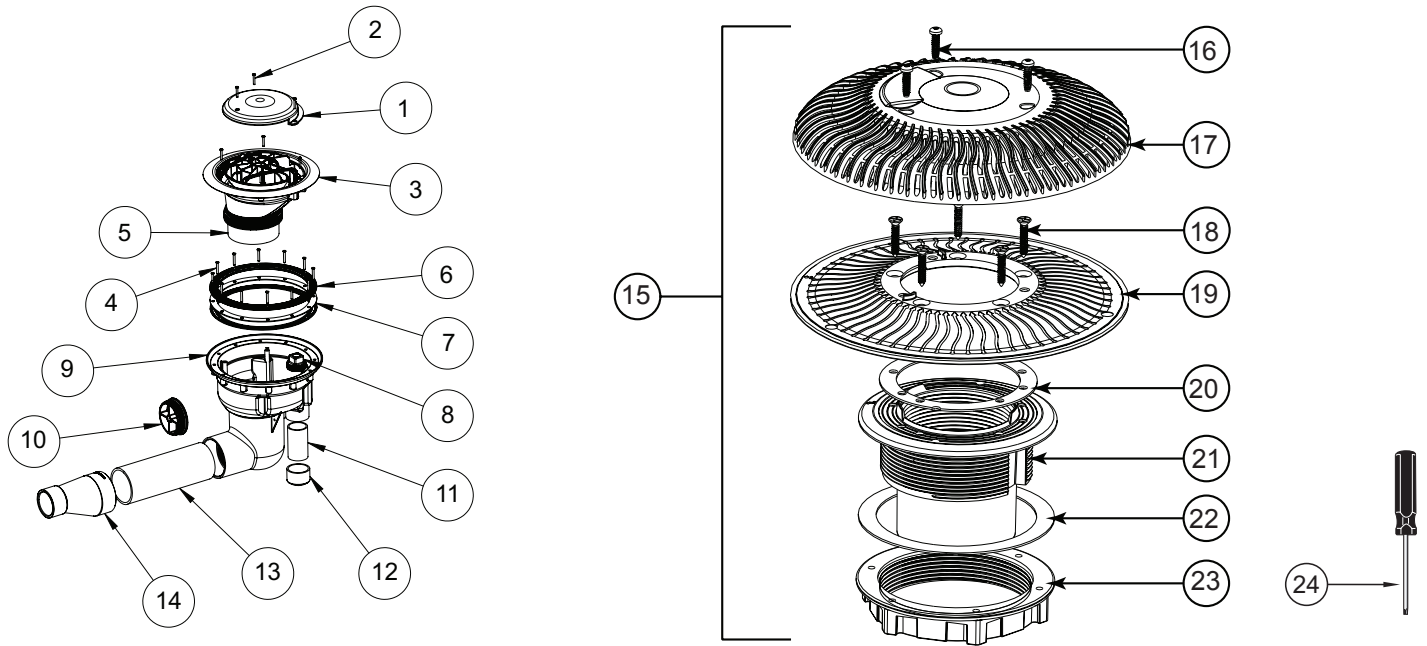


Fig. 10



004-272-2241-XX MDX-R3 FOR VINYL POOLS

Replace within 05 installed years



Item	Part Number	Description
1	005-252-2110-XX	Cover (XX=Color Code)
2		Screw: No. 10 X 1" Security Head
3	005-252-8234-XX	Funnel Assembly (Includes Support, Cover, Screw and Adapter)
4		Screw: No. 12 X 1 1/2" Flat Head
5	005-252-1045-00	Funnel Adapter
6	005-252-2044-00	Seal Ring
7	005-252-0010-00	Gasket (2 pk)
8	005-252-1605-00	Plug 2" NPT (6 pcs)
9	005-252-2007-00	Sump
10	005-252-1610-00	Plug 4" with O-Ring
11*		50mm Pipe - Not Included - Cap If Not Used
12*		50mm Cap - Not Included - Cap If Not Used
13	005-252-5524-00	Enlarged Suction Element
14	005-252-2550-00	Coupler Reducer 4" X 2 1/2"/3"
*	005-272-0841-00	Screw Pack Vinyl (19 pcs)
15	004-172-2212-XX	SDX High Flow Safety Drain (2 pk)
16	005-252-0821-00	Screw: 10 X 1 1/4 TORX W/PIN SS B (12 pcs)
17	005-252-2086-XX	SDX Cover w/ Screws Vinyl/Fiberglass
18	005-252-0816-00	Screw: 12-14 X 1" B (12 pcs)
19	005-252-2068-00	SDX Support Vinyl/Fiberglass
20	005-252-0072-00	SDX Gasket Vinyl/Fiberglass (2 pk)
21	005-252-2035-00	SDX Bulkhead Vinyl/Fiberglass 2 1/2"/3"
22	005-252-0074-00	SDX Bulkhead Gasket Vinyl/Fiberglass (1 pk)
23	005-252-2090-00	SDX Bulkhead Nut
24	005-252-0895-00	T25 Security Screwdriver

* Not Part of MDX-R3

For technical assistance call 1-800-621-5886 or contact your regional representative.

